




PT. KEMALA INTI SOLUSI


Rencana Pengembangan Infrastruktur Datacenter




Infrastruktur Datacenter Existing

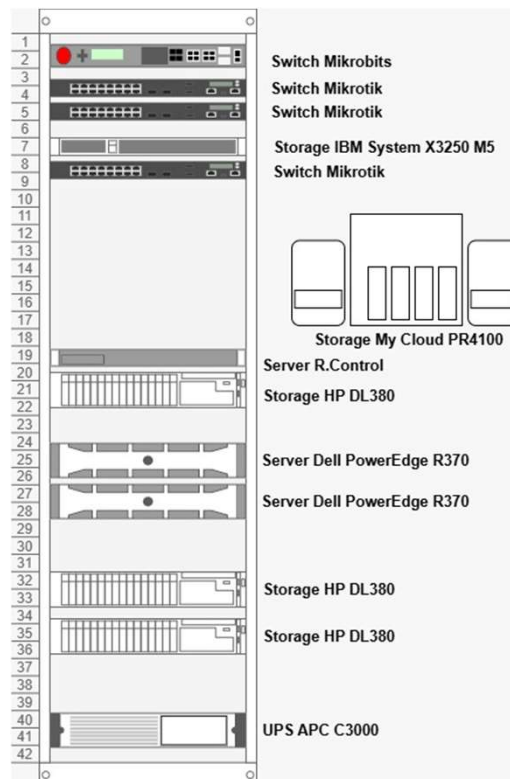

Rencana Pengembangan Infrastruktur Datacenter

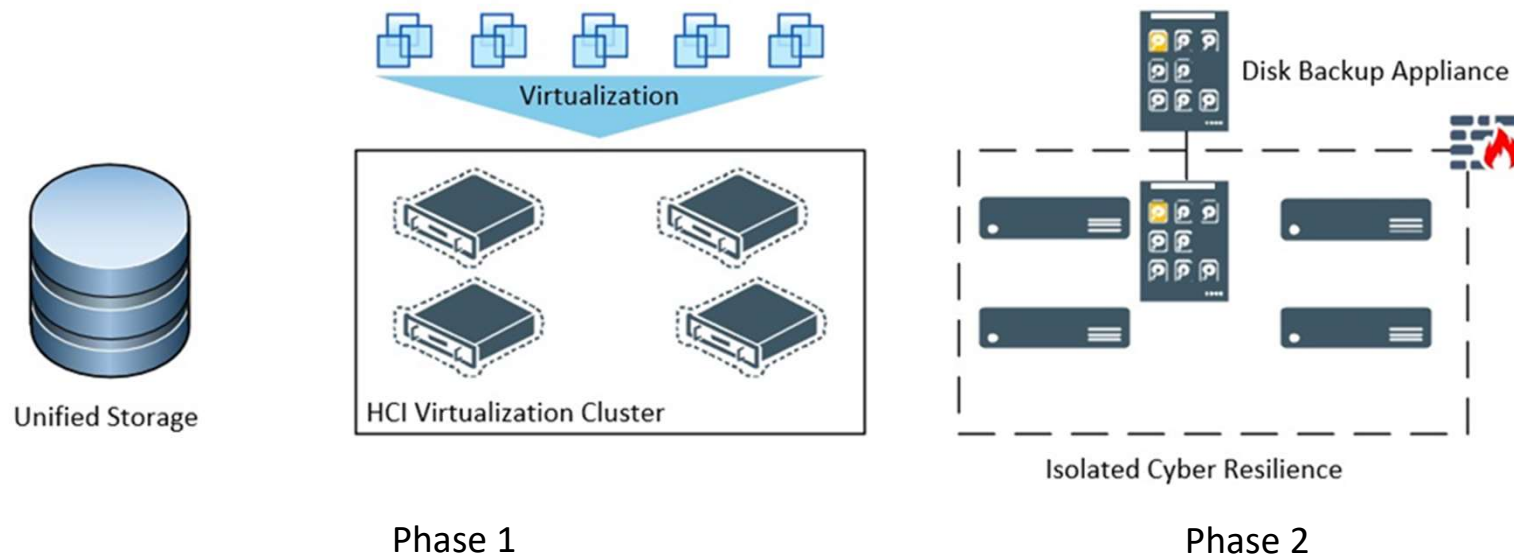

Rencana Pengembangan Infrastruktur Datacenter

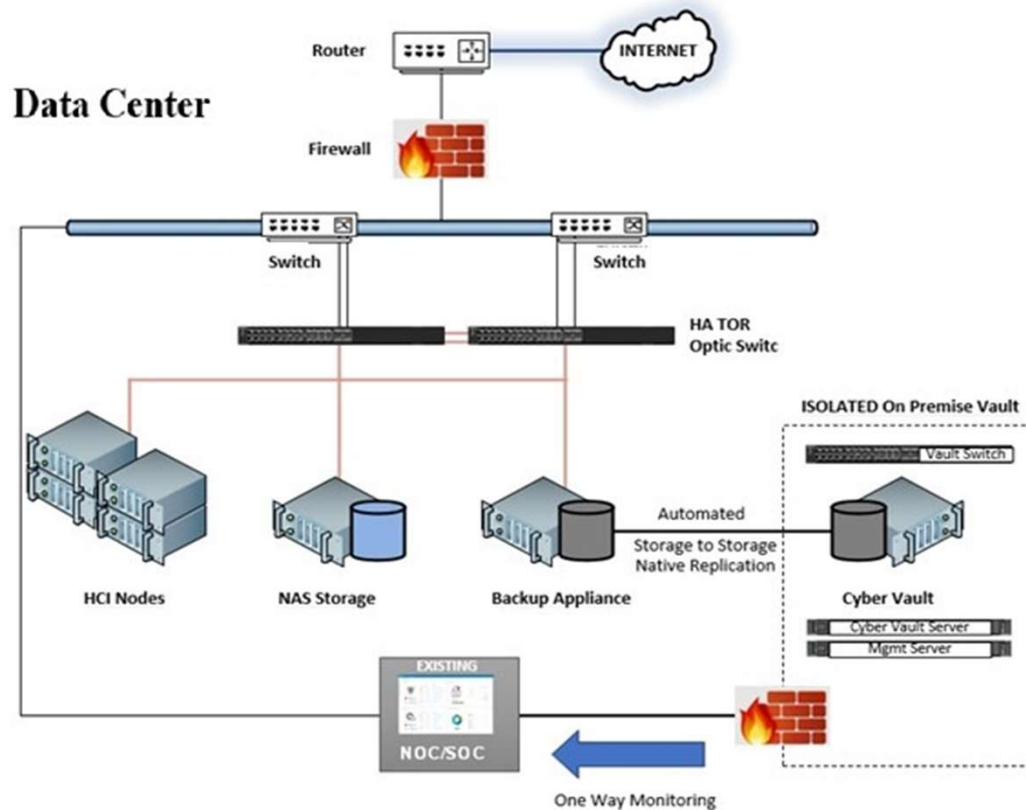

Rencana Pengembangan Infrastruktur Datacenter

JENIS	TIPE	SPESIFIKASI
Server	VXRail VE660	2x Intel Xeon Gold 6526Y 2.8G, 16C/32T, 20GT/s, 37.5M Cache, Turbo, HT (195W) DDR5-5200 8x 16GB RDIMM, 5600MT/s, Single Rank 5x 1.92TB Enterprise NVMe Read Intensive AG Drive U.2 Gen4 with carrier 1x VxRail VE-660, Riser Config 2, Low Profile 3x16 LP Slots (2xLP Gen5 + 1xLP Gen4) 1x Broadcom 57414 Dual Port 10/25GbE SFP28, OCP NIC 3.0 1x Broadcom 5720 Dual Port 1GbE LOM 1x Broadcom 57414 Dual Port 10/25GbE SFP28 Adapter, PCIe Low Profile, V2 1x Emulex LPe35002 Dual Port FC32 Fibre Channel HBA, PCIe Low Profile 1x Dual, Redundant(1+1), Hot-Plug Power Supply,1100W MM(100-240Vac) Titanium 2x Power Cord - C13, 1.9M, 250V, 10A (Indonesia, Laos, Vietnam) 4x SFP28 SR Optic, 25GbE, 85C, for all SFP28 ports 2x VxRail HCI System Software, 16G 5x VxRail HCI System Software, Capacity Drive, 1.92TB 8x VxRail HCI System Software Memory, 16GB, 16G 1x Performance Heatsink for 2 CPU configuration (CPU less than 250W) 1x BOSS-N1 controller card + with 2 M.2 960GB (RAID 1) 1x iDRAC9, Enterprise 16G 32x VxRail VMware vSphere Foundation (VVF), 3Yrs Subscription per Core - for Ind, ID, PHI & LATAM 9x VxRail VMware vSAN Add-On, 3Yrs Subscription per TiB - for Ind, ID, PHI & LATAM 1x Prosupport Plus and 4Hr Mission Critical VSAN ELA Initial, 36 Month(s)

Rencana Pengembangan Infrastruktur Datacenter

JENIS	TIPE	SPESIFIKASI
Storage	Unity XT380	1x Unity XT 380 DPE (210-ASKK) 1x Unity XT 380 DPE 25 x 2.5 Dell FLD RCK 1x D4 SYSPACK 4X800GB FLASH SSD 25X2.5 6x D4 1.6TB SAS FLASH 25X2.5 SSD 1x UNITY 2X4 PORT IO 32GB FC 1x Unity CNA 4x10GbE OPT SFPs 1x Pair of C13/C14 cables (Highline Power) or C19/C20 cables (480/680 Lowline Power) included with DPE 1x Unity XT HFA - SWAAA 1x Prosupport Plus and 4Hr Mission Critical Initial, 36 Month(s) -----
		1x Unity XT DAE (210-ASLH) 1x Unity XT 3U 15x3.5 DAE FLD RCK 10x D4 4TB NLSAS 15X3.5 DRIVE 1x C13 Power Cord Pair CEE7/7 plugs 2Meter

Rencana Pengembangan Infrastruktur Datacenter

JENIS	TIPE	SPESIFIKASI
Core Switch	AT-x530-52GTxm-E51	48-port 10/100/1000T stackable L3 switch with 8 x 1G/2.5G/5G ports, 4 x SFP+ ports and 2 fixed power supplies, EU Power Cord. 1 year NCA support (Start date is shipment date from ATI - Grace period 90 days)
Server Switch	AT-x530-52GTxm-E51	48-port 10/100/1000T stackable L3 switch with 8 x 1G/2.5G/5G ports, 4 x SFP+ ports and 2 fixed power supplies, EU Power Cord. 1 year NCA support (Start date is shipment date from ATI - Grace period 90 days)
Management Switch	AT-x540L-28XS-E51	10 Gigabit Layer 3 Stackable Switch, 28x SFP/SFP+ ports and a single fixed PSU, EU Power Cord. 1 year NCA support (Start date is shipment date from ATI - Grace period 90 days)

Rencana Pengembangan Infastruktur Datacenter

JENIS	TIPE	SPESIFIKASI
Firewall	Fortinet FG201-F	22 x GE RJ45 ports (including 2 x WAN ports, 1 x DMZ port, 1 x Mgmt port, 2 x HA ports, 16 x switch ports with 4 SFP port shared media), 4 SFP ports, 2x 10G SFP+ FortiLinks, 480GB onboard storage, dual power supplies redundancy. FORTISUBSCRIPTION FC-10-F201F-950-02-36 Unified Threat Protection (UTP) (IPS, Advanced Malware Protection, Application Control, URL, DNS & Video Filtering, Antispam Service, and FortiCare Premium) 3 Years FG-101F-85-36 NBD 8x5 ECS Premium Hardware Replacement Services for Fortinet*Approval by TAC Fortinet (RMA's Ticket) Required*NBD 8x5 SLA for Jakarta Area*Replacement Unit Delivered to Partner's Site
JENIS	TIPE	SPESIFIKASI
Firewall	Fortianalyzer FAZ-VM-GB5	Upgrade license for adding 5 GB/Day of Logs. FORTISUBSCRIPTION FC2-10-LV0VM-661-02-36 FortiGuard IOC and Outbreak Detection Service for FAZVM Perpetual (1-11 GB/Day of Logs) 3 years FORTISUBSCRIPTION FC2-10-LV0VM-248-02-36 FortiCare Premium Support (for 1-11 GB/Day of Logs) 3 years